

# Create your Digital Twin in days, not months.

Introduction to Digital Twin and ISO 10303 standards

*Kjell Bengtsson, Jotne*

*[Kjell.Bengtsson@jotne.com](mailto:Kjell.Bengtsson@jotne.com)*



**KYKLOS 4.0**



Supported by advanced EU H2020 projects



## Built Environment



## Defence




## Aeronautics






## ABOUT JOTNE IT

The leader in product data exchange and sharing  
Jotne EPM Technology data products have  
successfully reduced development and product  
lifecycle costs through the use of intelligent data  
management in the areas of Defense, Aeronaut  
Oil & Gas, Built Environment and Aerospace.

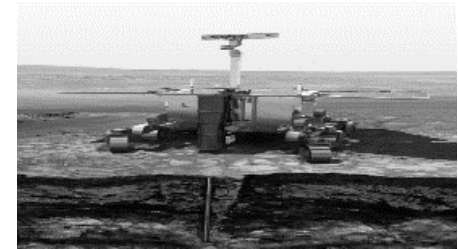


## Space

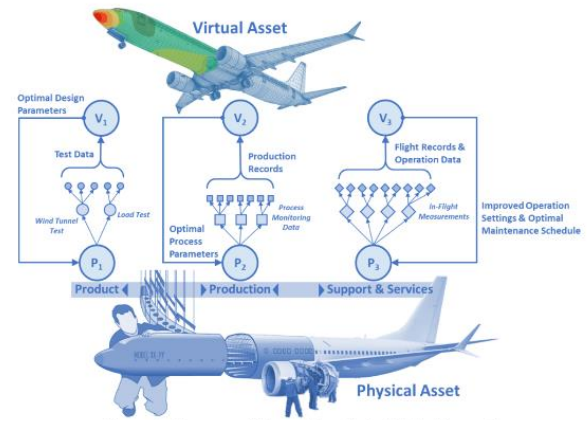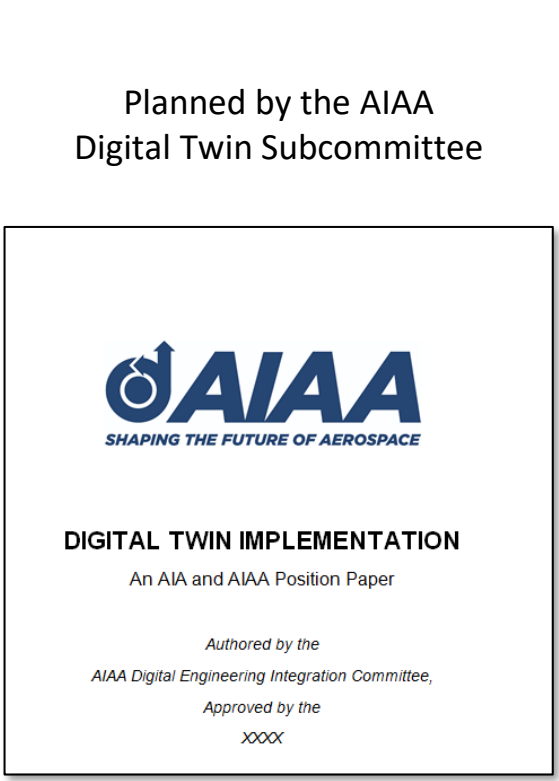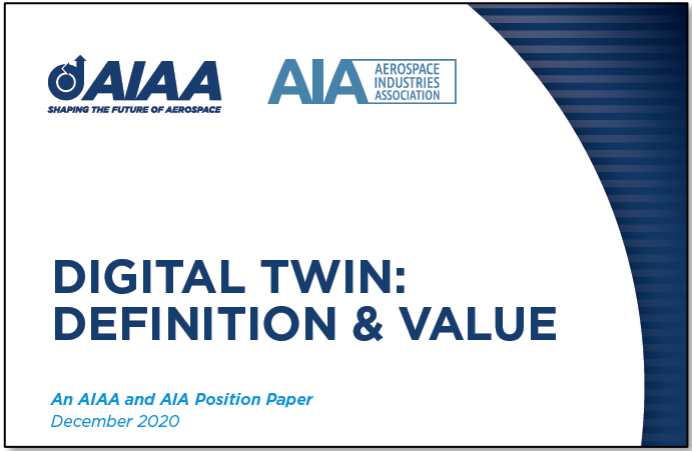

Presented by Digital  
Engineering Integration  
Committee (DEIC), 18 August

# Standards

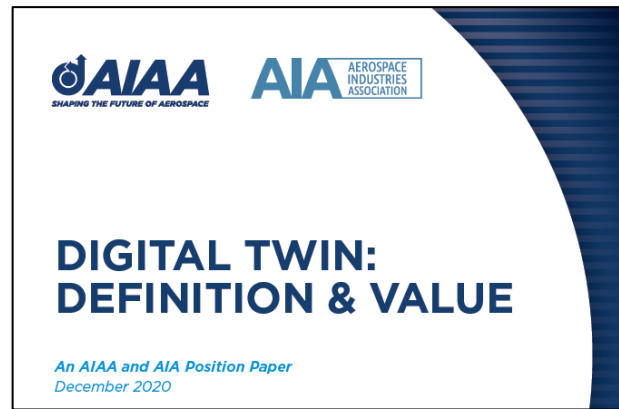

1. Need to develop appropriate standards and/or standard approaches so that Digital Twins can interact with other Digital Twins across the life cycle and supply chain.
2. Significant value and increased collaboration could be realized by establishing appropriate foundational open standards (e.g. data and models) and life cycle architecture frameworks.
3. Therefore, additional focus and effort should also be given to addressing which elements of this foundation should be open.

# Used in Eurofighter PDM



**BAE SYSTEMS**

# How is STEP Used at Lockheed Martin

## Geometric Data Exchange - AP 203, AP 242


- Exchanging data between different systems (CAD, CAM, CAE, and PDM)
- Enabling 3D model information to integrate into non-CAD applications
- Supplier data exchange

## Technical Data Package Core Information Exchange - AP 232

Supporting Various Aircraft Programs Including F-16, F-22, F-35, T-50, F-2 and C-130J

STEP converter development

Lockheed Martin Handles 500,000+ STEP Files per year

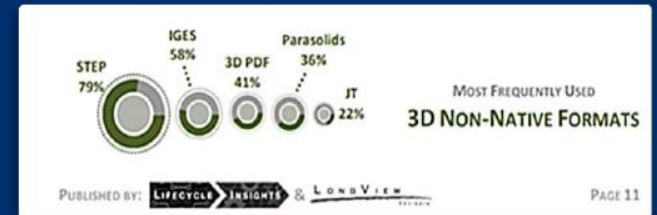

# Why AI need standardized information models



**E 6**

AI has a data quality problem



AI needs better data,  
not just more data

Big data is so often improperly formatted, lacking metadata, or “dirty,” meaning incomplete, incorrect, or inconsistent, that data scientists typically spend 80 percent of their time on cleaning and preparing data to make it usable, leaving them with just 20 percent of their time to focus on actually using data for analysis.

**77% of professionals believe that interoperability is the largest challenge facing the industrial internet.** © survey by IoT Nexus







# ISO 10303 STEP Standards development



1994: CAD  
AP203





1999: PLM  
AP214




2005: ILS  
AP239



2014: CAE  
AP242/209

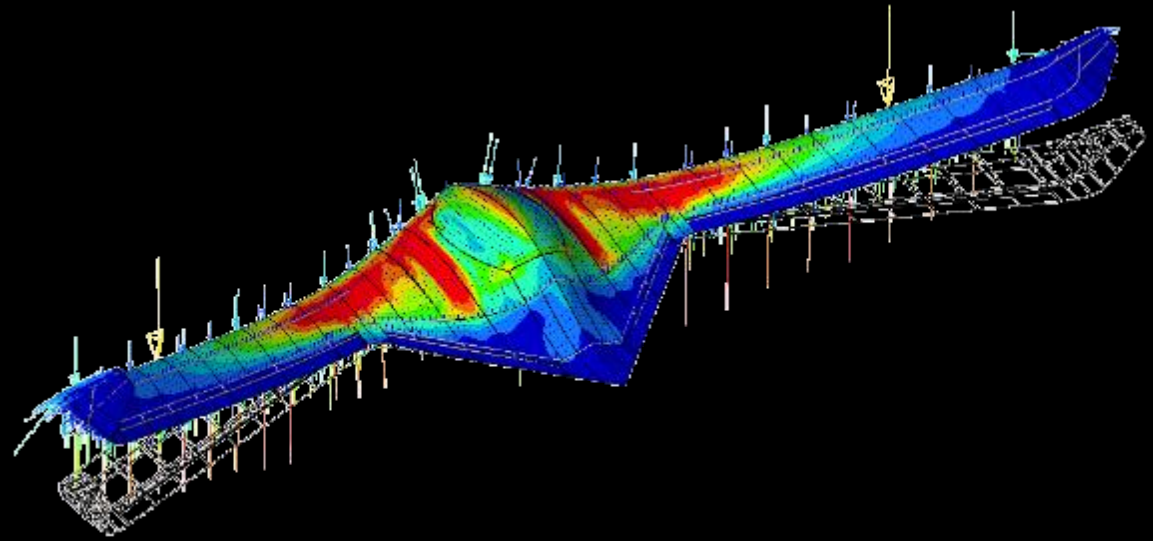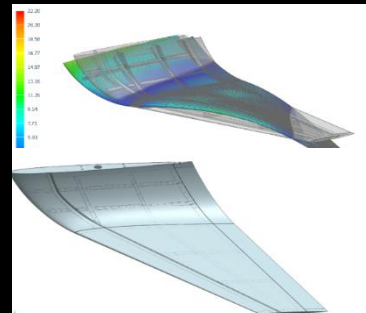

# CAD, Simulation, Manufacturing, Test, Sensor and Operational Data in one standardized repository using ISO 10303. Facts or fiction?

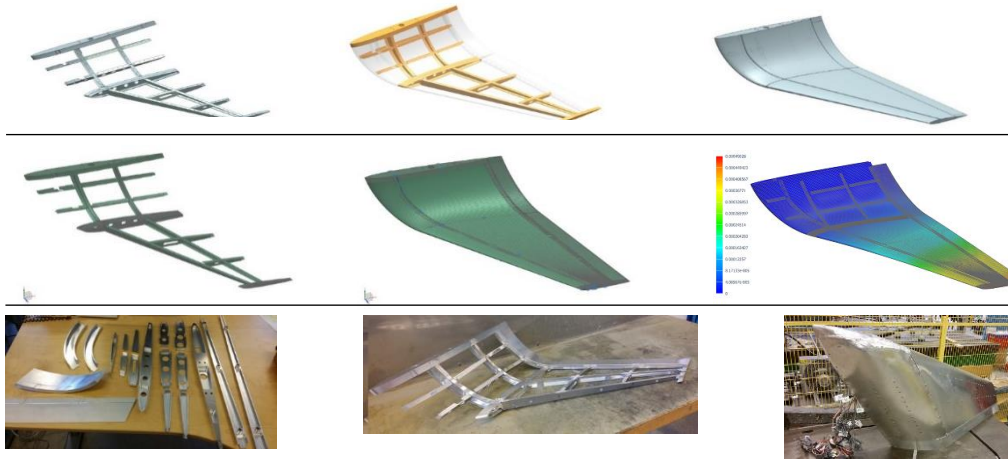

**Design CAD**


**Analysis FEM**




**Manufacturing**



**Sensor data**


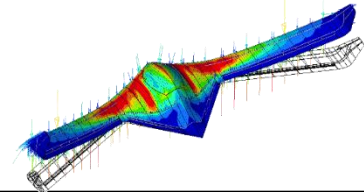


# Content of ISO 10303-242/209

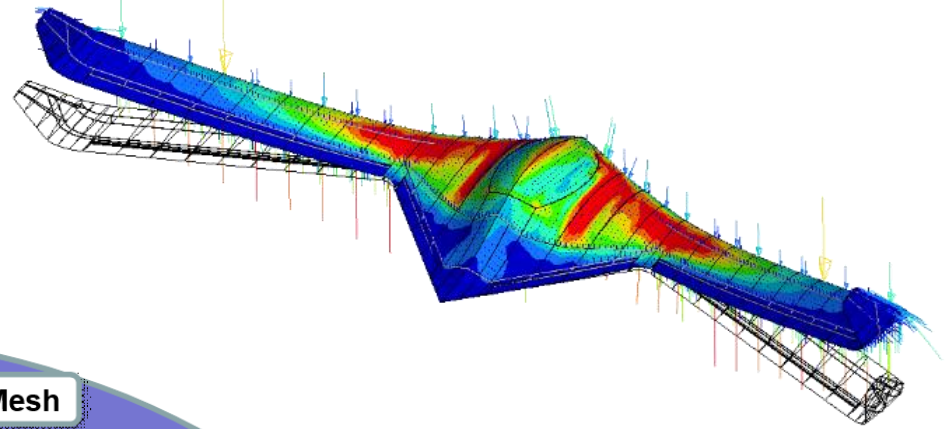


AP242

AP209ed2

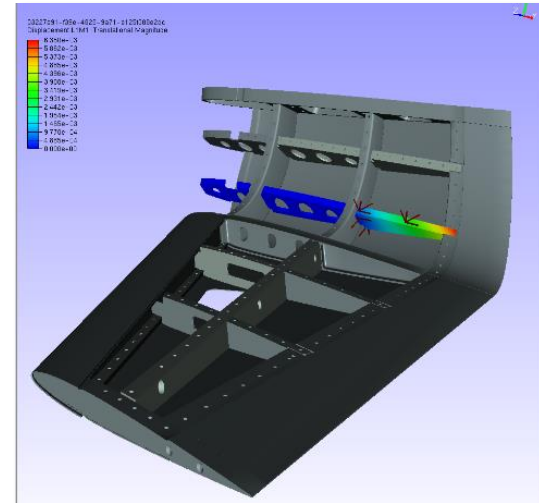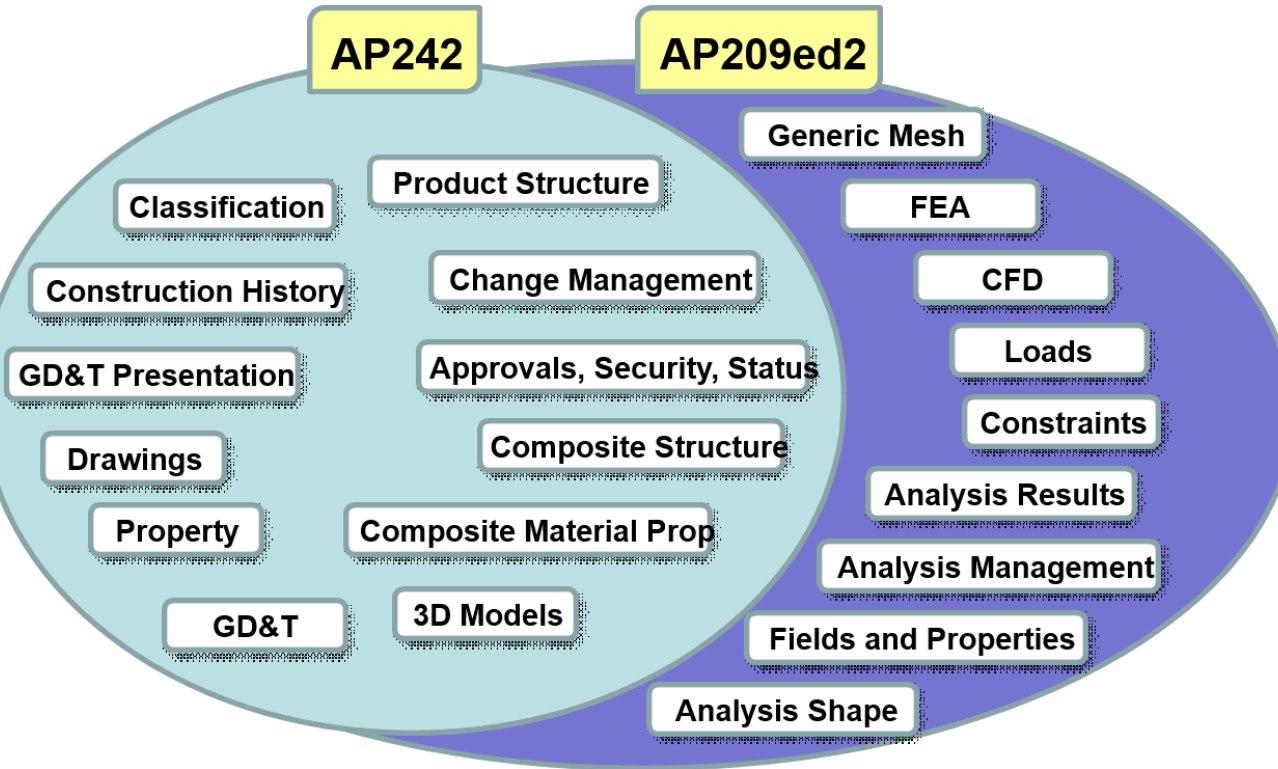

# Properties in ISO 10303 and ISO 12006

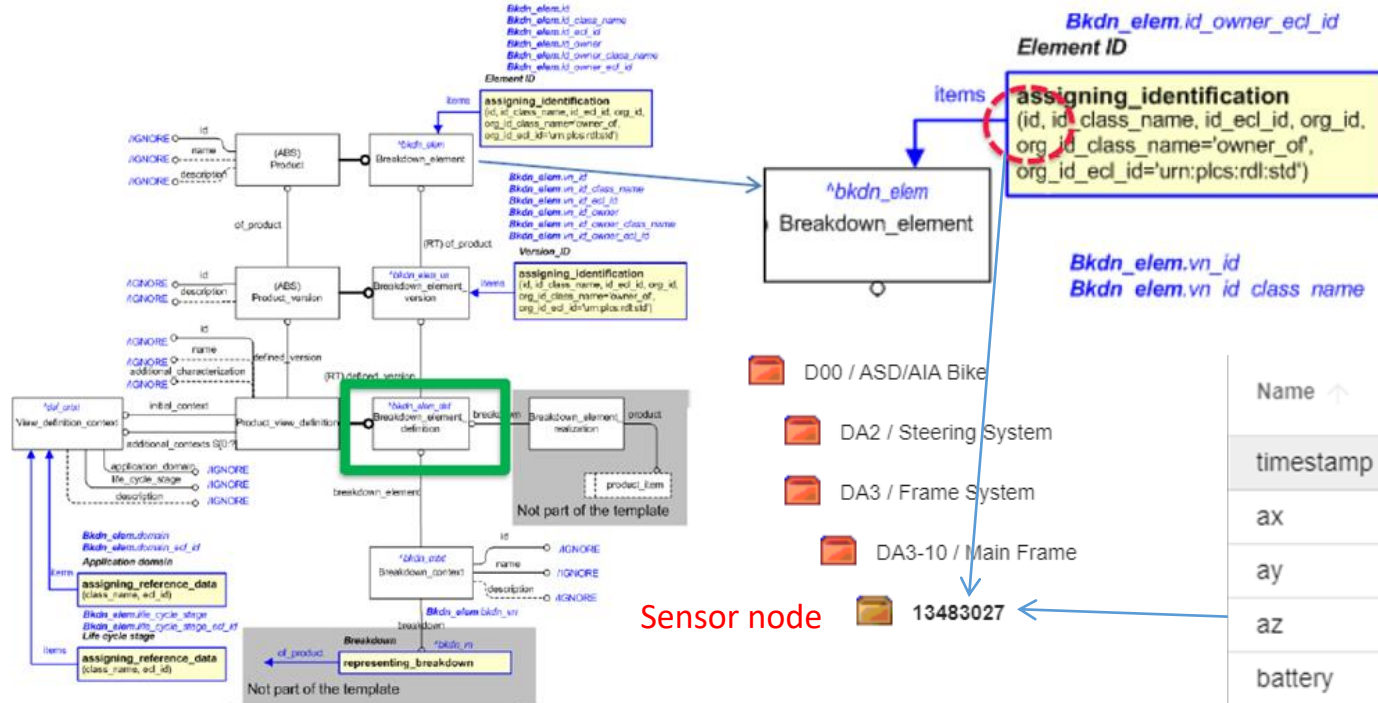


ISO 10303

OWL

ISO 12006

These concepts are deployed by PLM vendors like PTC

# DEFINE – Digital Twin for validation

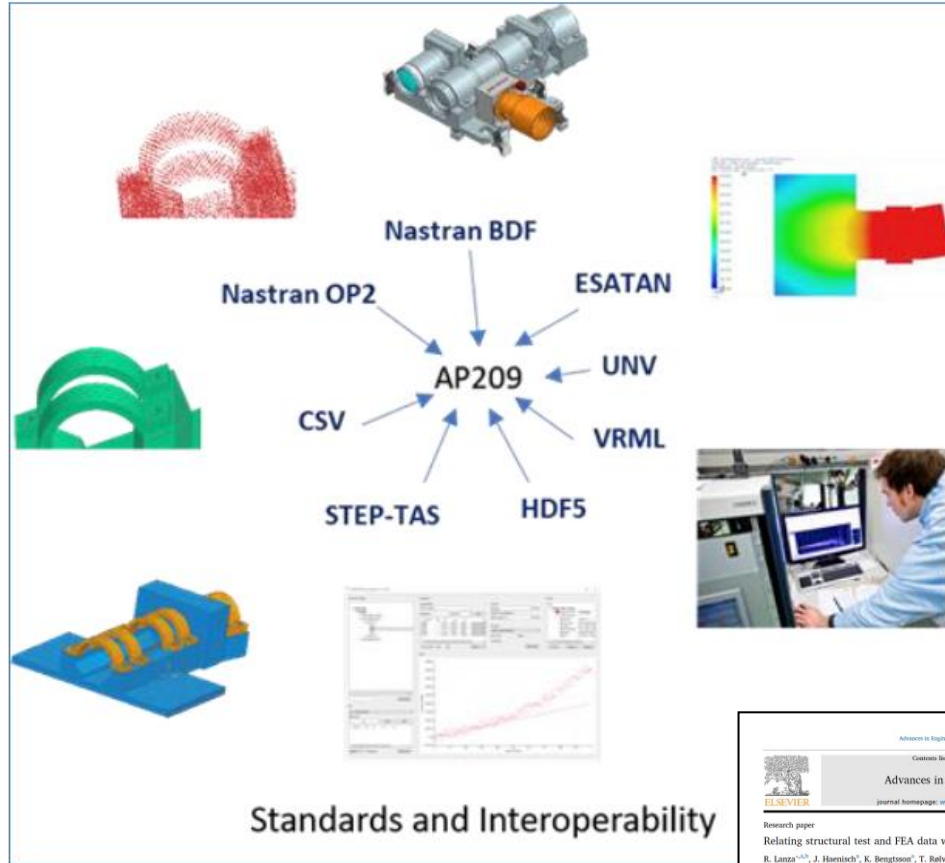

Advances in Engineering Software 137 (2019) 96–105

Contents lists available at ScienceDirect

Advances in Engineering Software

journal homepage: [www.elsevier.com/locate/advengsoft](http://www.elsevier.com/locate/advengsoft)

Research paper

Relating structural test and FEA data with STEP AP209

R. Lanza<sup>a,\*</sup>, J. Haenschel<sup>a</sup>, K. Bengtsson<sup>b</sup>, T. Rørvik<sup>b</sup>

<sup>a</sup>Asus ITM Technology AB, Gunnarshuset 107, 400 4602, Norway

<sup>b</sup>Norwegian University of Science and Technology, 4710 Skjolderveien 16, Trondheim, Norway

ARTICLE INFO

Keywords:

STEP data

FEA analysis

Structural testing

Interoperability


Simulation data management

ABSTRACT

This paper proposes a method for incorporating FEA data and structural test data into one common standardized data model based on the ISO 15926 STEP standard (1). The proposed method takes advantage of data structure and classes defined in STEP AP209 (section 2 (2)) to provide traceability between analysis and testing phases. Information such as source and finite elements, test and FEA load cases, and test and FEA results are included. It also presents an introduction to STEP and AP209, and discusses how it can be used in a Simulation Data Management environment.

PhD paper here:

<https://www.sciencedirect.com/science/article/pii/S0965997818301947>


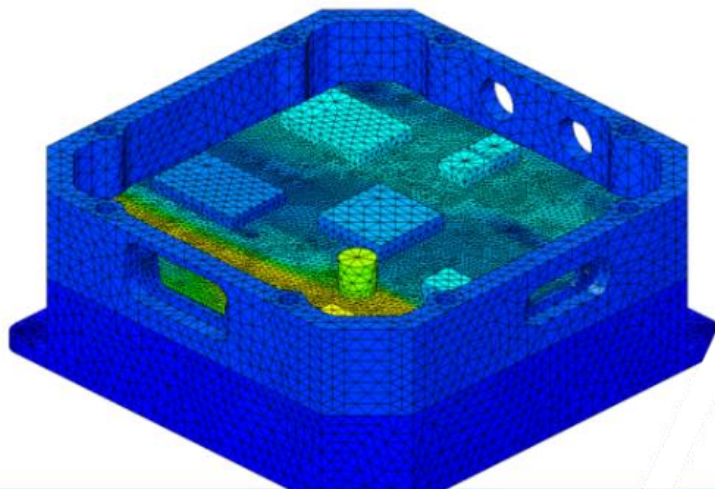


Temp (Celsius)



7,542e+

7,246

0,9

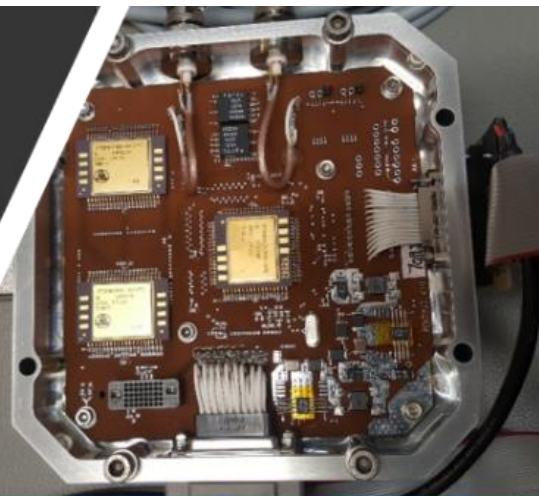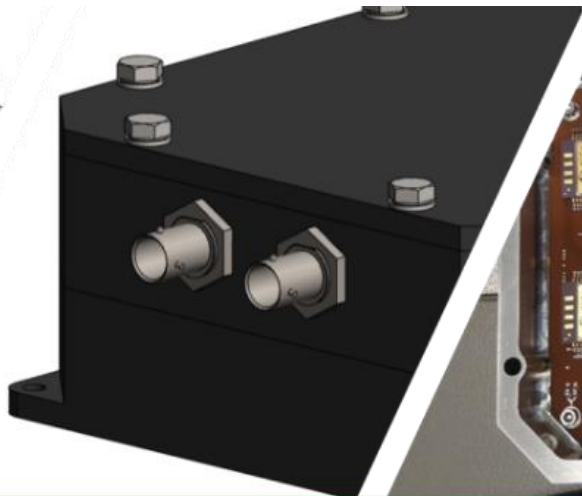

# METRIC: STANDARD BASED DIGITAL TWIN

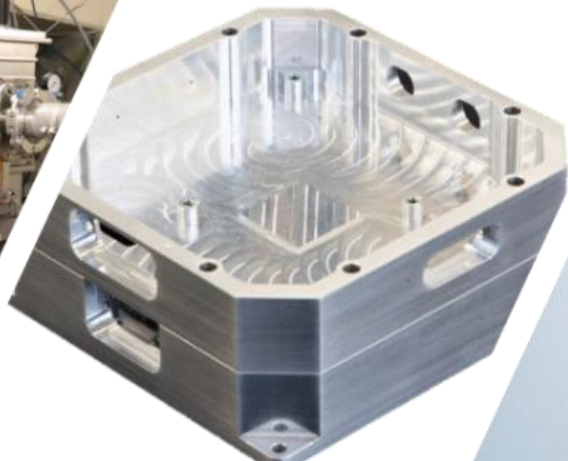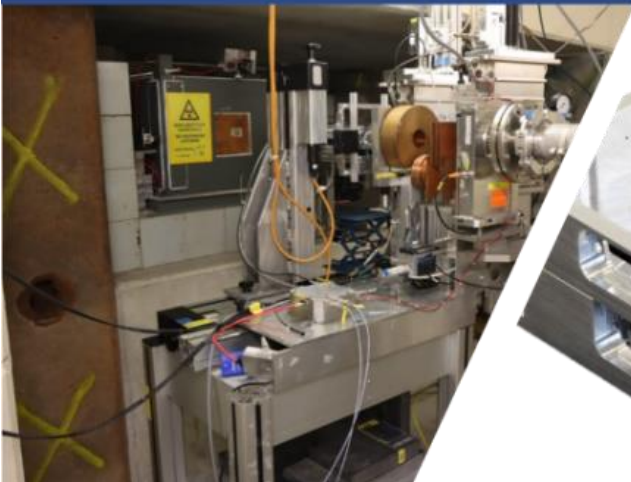



Kjell Bengtsson


Vice President - Jotne

1d • Edited •



Happy to announce that the first formal project meeting in the Centre for Space Sensors and Systems - CENSSS- was performed this week. The team consist of many interesting organizations, including the once that developed the RIMFAX Radar that sees underground on Mars, part of the NASA Perseverance Rover. The CENSSS team is reaching out for new space opportunities and is managed by University of Oslo.

[#aerospace](#) [#digitaltwin](#) [#PLM](#)

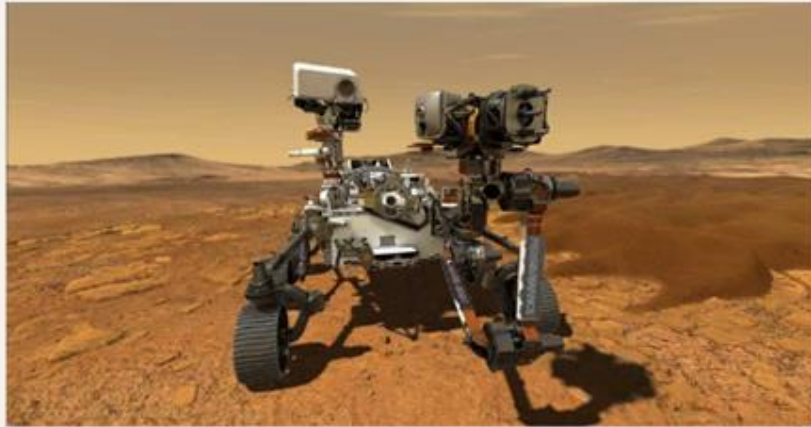

Mars 2020 Perseverance Rover

[mars.nasa.gov](https://mars.nasa.gov) • 1 min read

16 • 1 comment

Like Comment Share Send

690 views of your post in the feed

# CENSSS.no

## Digital Twin for Spacecraft

CENSSS will in collaboration with Norwegian industry develop new instruments and sensor systems, New-Space satellites system integration, operation and exploitation of satellite data.

Using Standard Based Digital Twins based on open and publicly available specifications makes it easier to trace products and sensor information, and to integrate these in a well-arranged manner. This improves data exchange, sharing and archiving processes, cutting both time and cost, yet improving quality.

# Jotne on Digital Twin - EU R&D


**CHANGE2TWIN**



KYKLOS 4.0

1 2

3 4

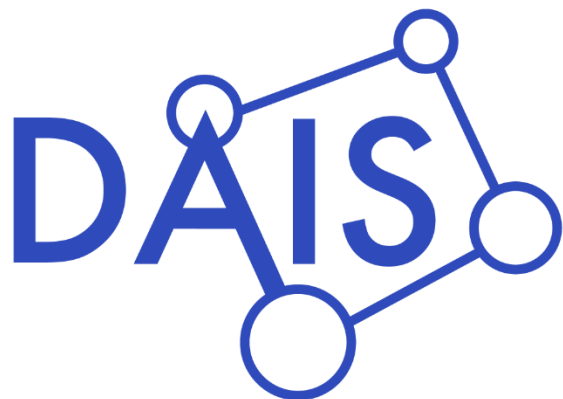

ARROWHEAD  
TOOLS





# Digital Twin for Additive Manufacturing Process

Jotne provides Digital Twins capabilities to overcome existing issues SMEs are facing

**Data Storage**  
– Collect data along the life of a product or project cycle

**Interoperability**  
↓  
Data Exchange - Export/import facilities using ISO 10303-239/209

**Data Archiving** - project data can be exported in a standard format that does not depend on specific software

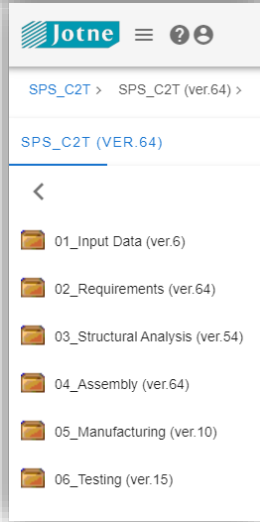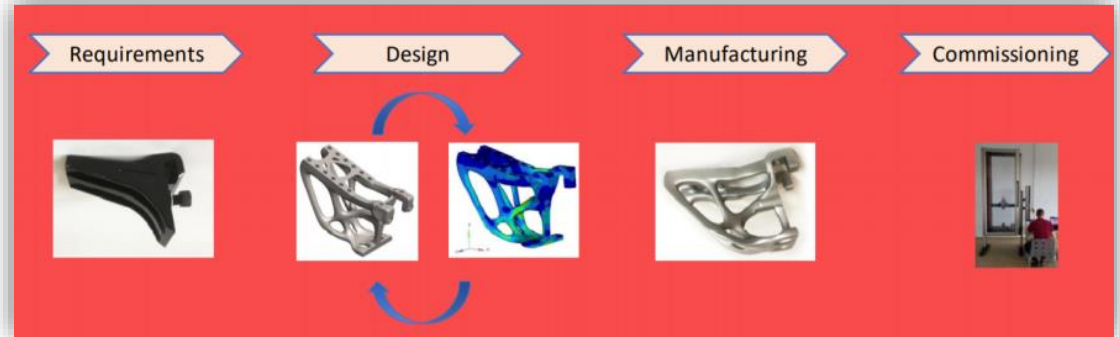


## SPS working on Pilot Use Case - Prothesis Adapter in collaboration with Jotne

Integration of other CAD tool with PLM

CAD and document management

Change management Functionality

Follow Standardised procedure for data exchange

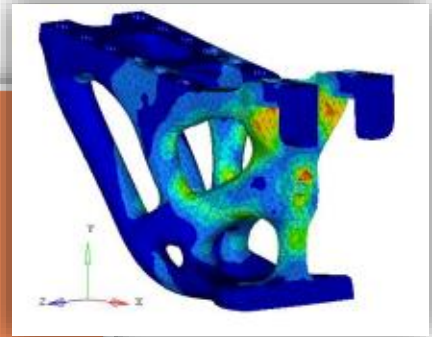

# KYKLOS 4.0 Smart and Circular Manufacturing



KYKLOS 4.0

KYKLOS 4.0 will **demonstrate** the transformative effects that Circular Production System (CPS), Product Life Management (PLM), Life Cycle Analysis (LCA), Augmented Reality (AR) and Artificial Intelligence (AI) technologies and methodologies will have to the **Circular Manufacturing** framework

## Smart Manufacturing Pilots

**01** Aerospace Pilot  
(GENERAL ELECTRIC and KANFIT3D facilities – Israel)

**02** Electronic Devices/Equipment Pilot  
(VESTEL facilities – Turkey)

**03** Medical Pilot  
(PRO MEDICARE facilities – Italy)

**04** Electronic Manufacturer Pilot  
(CONTINENTAL facilities – Romania)

## Circular Manufacturing Pilots

**01** Automotive Pilot  
(DIGRO facilities – Italy)

**02** Shipyard Pilot  
(ASTANDER facilities – Spain)

**03** Food Industry Pilot  
(PINDOS Cooperative facilities – Greece)





VESTEL

Continental

ASTANDER



# Digital Twin: Manufacturing process

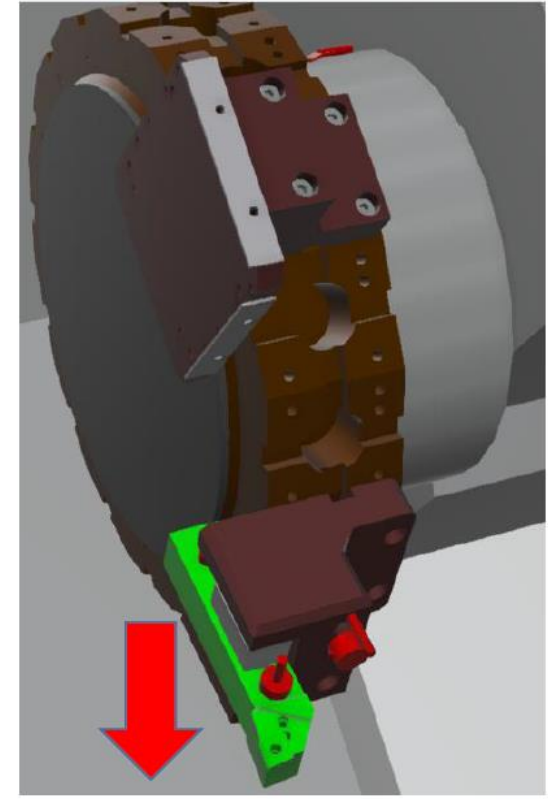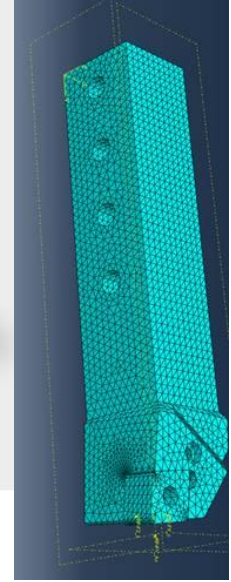


**Force / Time**

Paper @ NAFEMS World 2021 Congress:  
PhD Student Mariane Prado Motta





# Digital Twin of Waterpower Solutions

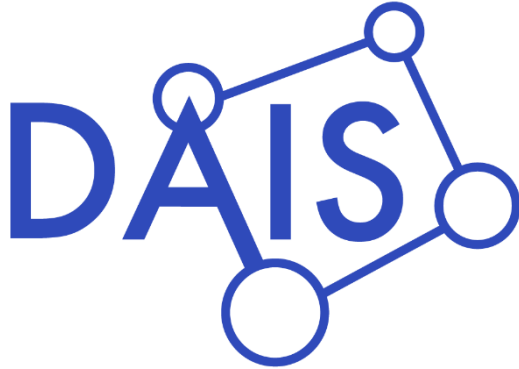


Distributed Artificial Intelligent Systems  
Large EU/ECSEL project

Norwegian use case:

Due to a variable demand in the energy market, frequent start and stop actions are required by hydropower plants to provide regulation of turbines.

Instrumenting the turbines with microphones and analysing anomalies in the gathered sound data could help optimise start- and stop routines and consequently reduce wear.

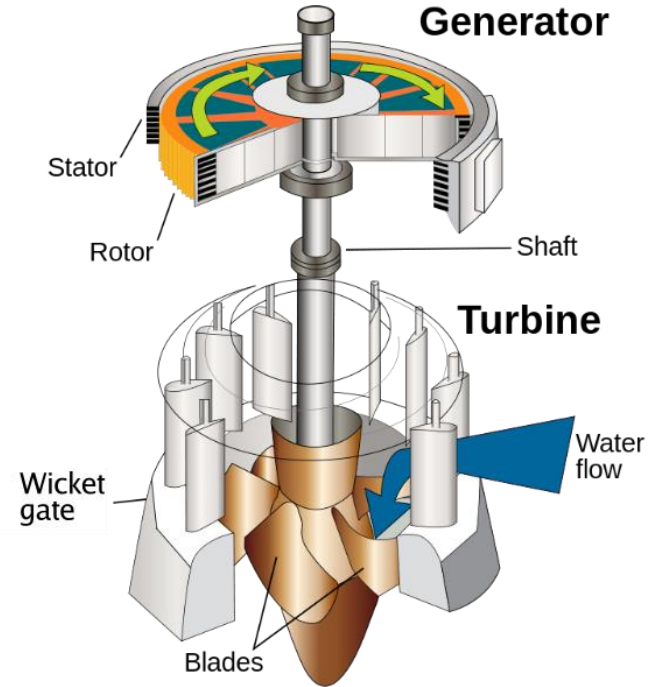

Source: Wikipedia



# *Arrowhead Tools*

## Europe's largest Automation and Digitalisation Engineering project

- Joint European effort in 18 countries
- 80 partners
- 90 M€ budget
- Duration 2019-2022


Coordinator: Prof. Jerker Delsing,  
Lulea University of Technology

<https://www.arrowhead.eu/>

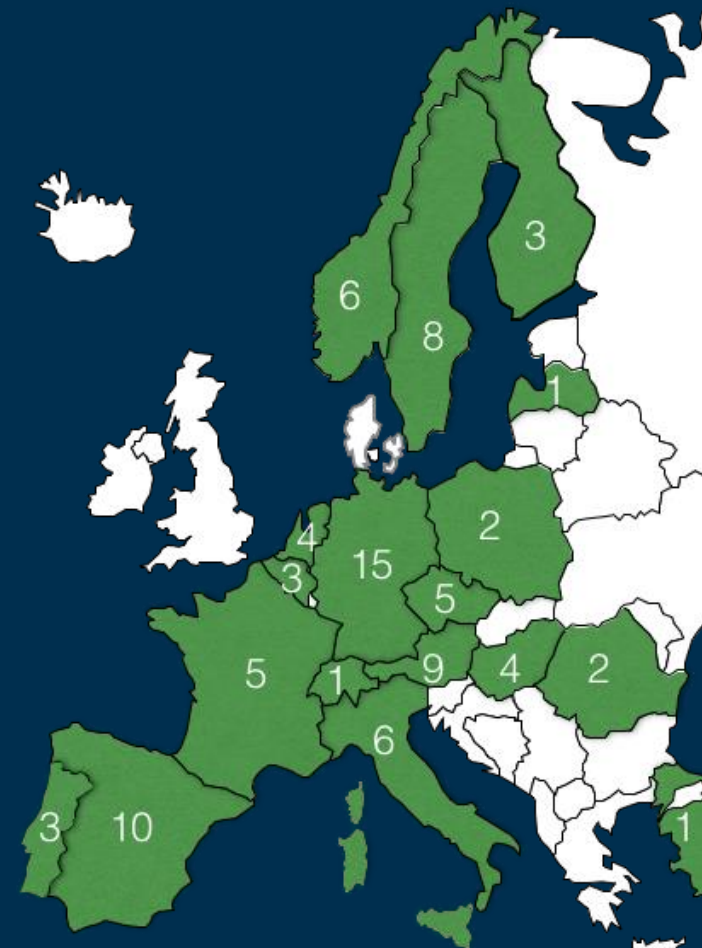


# Engineering efficiency improvements


## Validation and verification in 21 advanced use cases

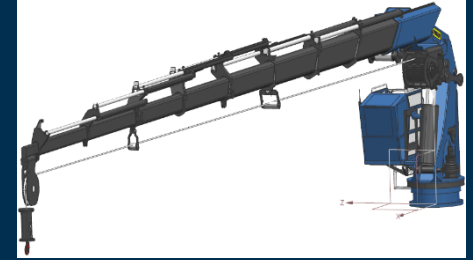

- Automotive
- Mining
- Electronics

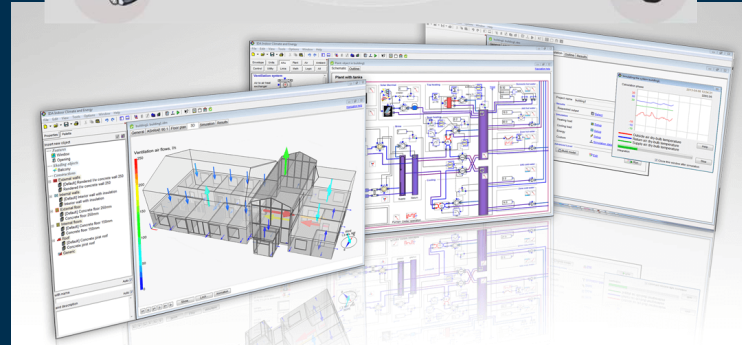

- Software
- Building Sector
- Offshore

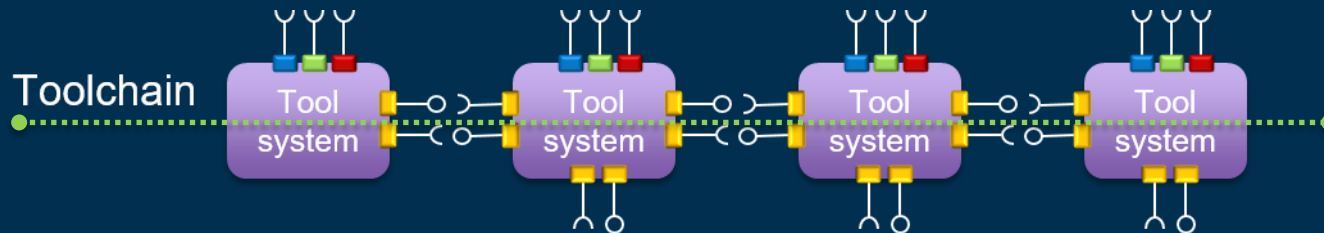

# A comparison of IoT-SoS Architectures & Platforms

Features	Arrowhead	AUTOSAR	BaSyx	FIWARE	IoTivity	LWM2M	OCF
<b>Key principles</b>	SOA, Local Automation Clouds	Runtime, Electronic Control Unit (ECU)	Variability of production processes	Context awareness	Device-to-device communication	M2M, Constrained networks	Resource Oriented REST, Certification
<b>Real-time</b>	Yes	Yes	No	No	Yes (IoTivityConstrained)	No	No
<b>Run-time</b>	Dynamic orchestration and authorization, monitoring, and dynamic automation	Runtime Environment layer (RTE)	Runtime environment	Monitoring, dynamic service selection and verification	No	No	No
<b>Distribution</b>	Distributed	Centralize	Centralize	Centralize	Centralize	Centralize	Centralize
<b>Open Source</b>	Yes	No	Yes	Yes	Yes	Yes	No
<b>Resource accessibility</b>	High	Low	Very low	High	Medium	Medium	Low
<b>Supporters</b>	Arrowhead	AUTOSAR	Basys 4.0	FIWARE Foundation	Open Connectivity Foundation	OMA SpecWorks	Open Connectivity Foundation
<b>Message patterns</b>	Req/Repl, Pub/sub	Req/Repl, Pub/sub	Req/Repl,	Req/Repl, Pub/sub	Req/Repl, Pub/sub	Req/Repl	Req/Repl
<b>Transport protocols</b>	TCP, UDP, DTLS/TLS	TCP, UDP, TLS	TCP	TCP, UDP, DTLS/TLS	TCP, UDP, DTLS/TLS	TCP, UDP, DTLS/TLS, SMS	TCP, UDP, DTLS/TLS, BLE
<b>Communication protocols</b>	HTTP, CoAP, MQTT, OPC-UA	HTTP	HTTP, OPC-UA	HTTP, RTPS	HTTP, CoAP	CoAP	HTTP, CoAP
<b>3<sup>rd</sup> party and Legacy systems adaptability</b>	Yes	Yes	Yes	Yes	No	No	No
<b>Security Manager</b>	Authentication, Authorization and Accounting Core System	Crypto Service Manager, Secure Onboard Communication	--	Identity Manager Enabler	Secure Resource Manager	OSCORE	Secure Resource Manager
<b>Standardization</b>	Use of existing standards	AUTOSAR standards	Use of existing standards	FIWARE NGSI	OCF standards	Use of existing standards	OCF standards


C. Paniagua and J. Delsing, "Industrial Frameworks for Internet of Things: A Survey," in *IEEE Systems Journal*, doi: 10.1109/JSYST.2020.2993323.

[www.arrowhead.eu/arrowheadframework](http://www.arrowhead.eu/arrowheadframework) and download [www.github.com/arrowhead-f](https://www.github.com/arrowhead-f)



# Digital Twin Based Crane Monitoring

Digital Twin: As simulated

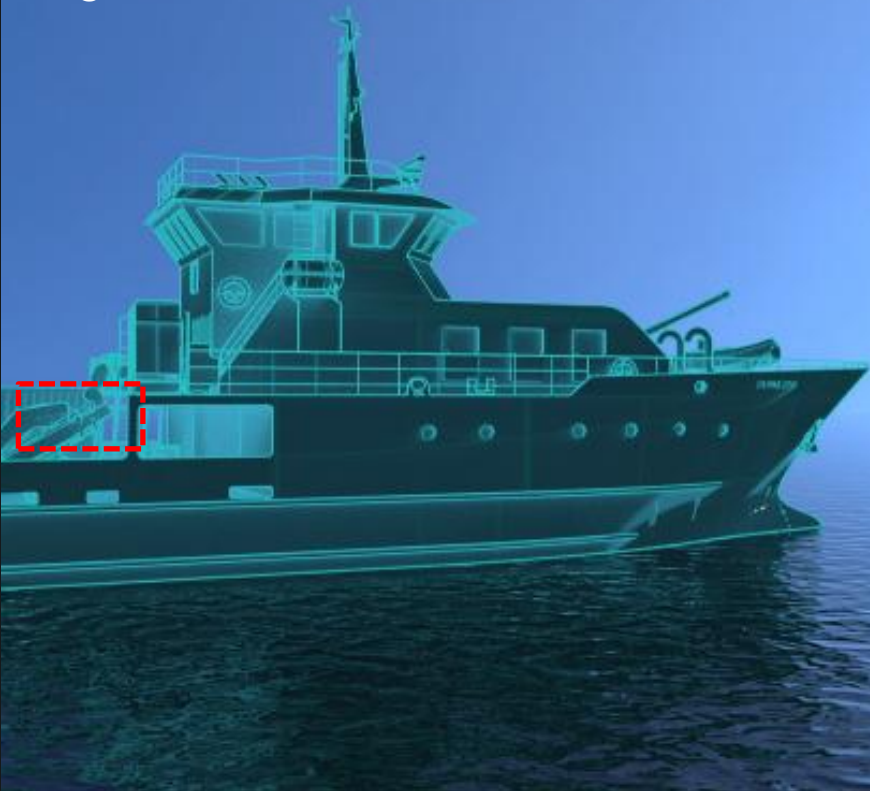

In Operation




# Norwegian Use Case: Digital twins and structural monitoring



# Crane Implementation



From Physical  
Inspections

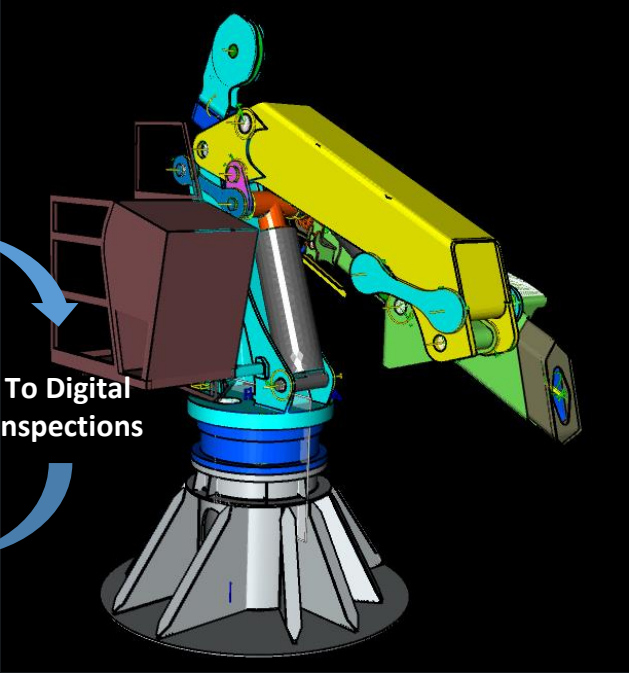

To Digital  
Inspections

# Digital Twin FEA technology


Our Digital Twin models are simulated real time in FEDEM:



Mesh too dense  
to be shown  
(3.6 mill DOFs)

- CAE
  - 3D modelling / idealization
  - Joint / spring / damper / sensor modelling
  - Substructuring ( 25 super elements)
  - Meshing
- Dynamic simulation (nonlinear FEA)
  - Forces, Positions, Velocities and Accelerations
- Structural Analysis
  - Stresses / strains
  - Vibration frequencies
  - Damage / durability
- Control / hydraulics
  - PI / PD / PID Controllers
  - Closed loop dynamics

$$M(r, \dot{r}) \ddot{r}(t) + C(r, \dot{r}, t) \dot{r}(t) + K(r, t, \sigma) r(t) = F(t)$$
$$\epsilon_{\text{rosette}} = [T_{re} \tilde{B} T A L H] v_{\text{sup}}$$

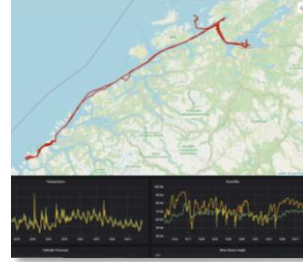

SENSORS



GATEWAY



CLOUD




AHT IoT FRAMEWORK




REST SERVICES



PLM STANDARDS



THE SOLUTION  
FINAL OUTCOME

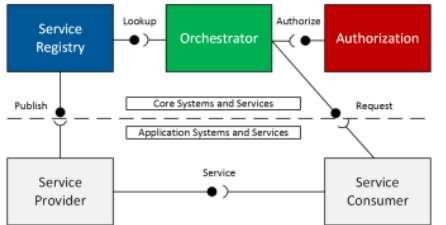


- Read: **GET**
- Read: **GET**
- Create: **POST**
- Update: **PUT**
- Delete: **DELETE**

- ▾ D00 / ASDIAIA Bike
  - DA0 / Wheels
  - DA1 / Brake System
  - DA2 / Steering System
  - ▾ DA3 / Frame System
    - DA3-10 / Main Frame
    - Tello-sensor








# Crane Digital Twin Validation



Crane deployment takes 130 seconds:

Simulation takes 75 seconds:

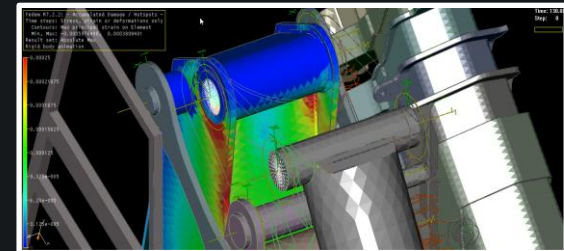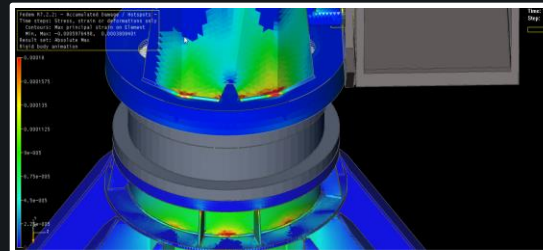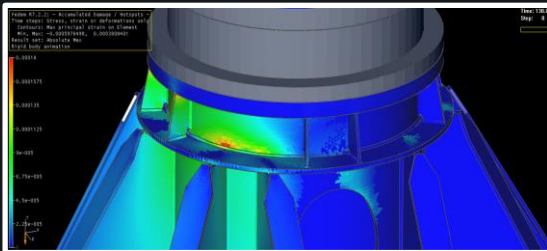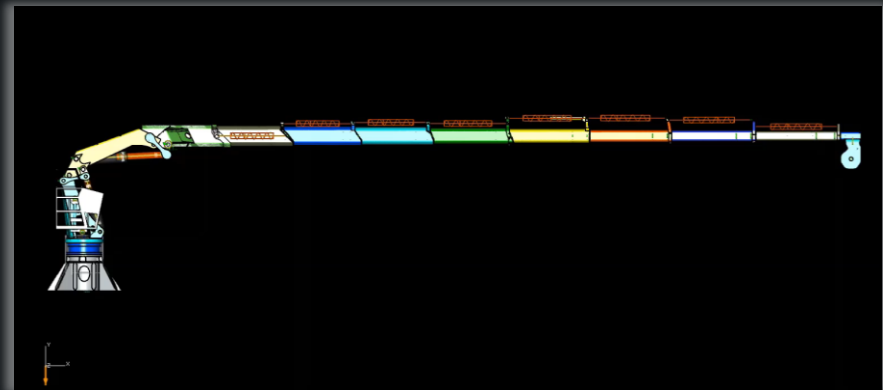

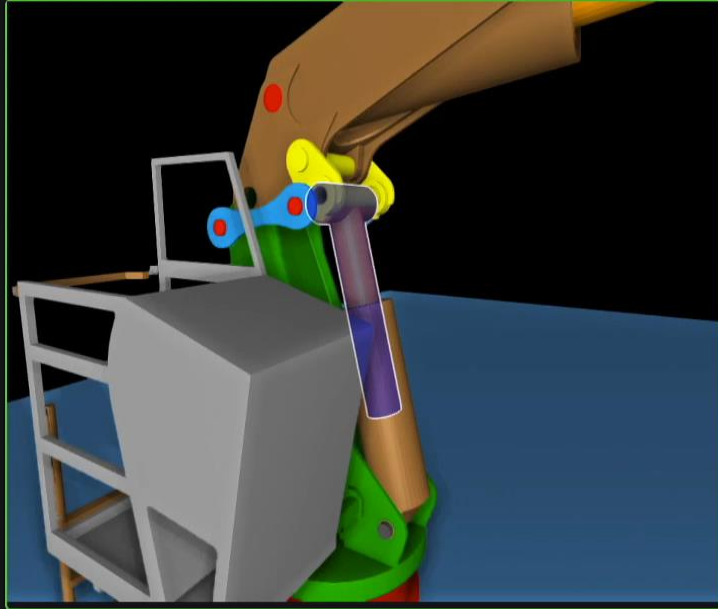

Main Cylinder Angle






Main Cylinder Angle

Second Cylinder Angle





Outer Link Angle

Outer Link Extension Length

Slewing Angle

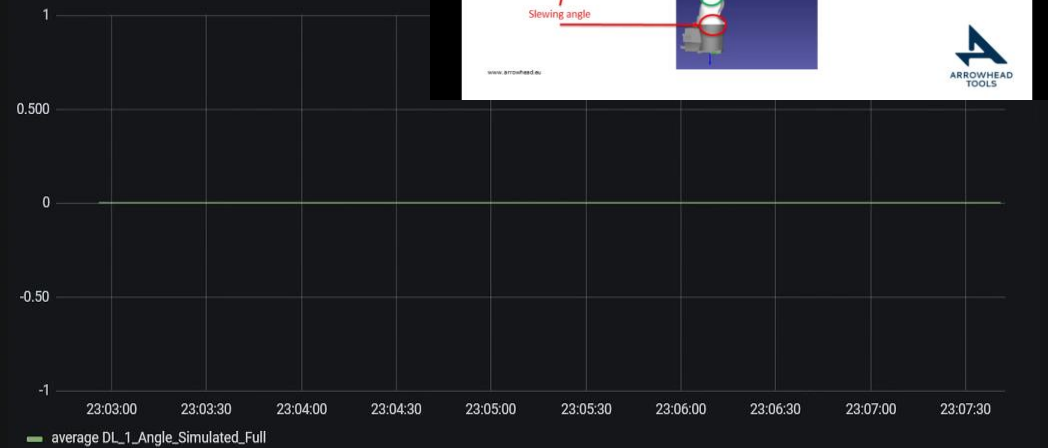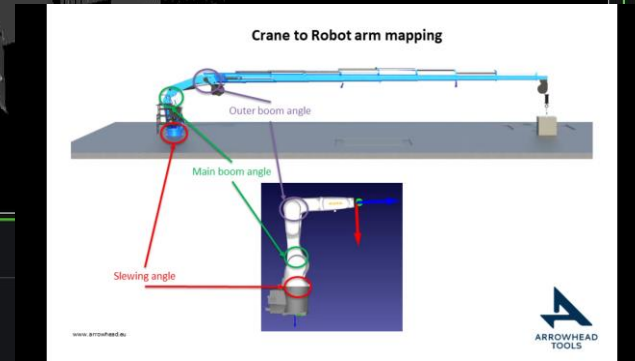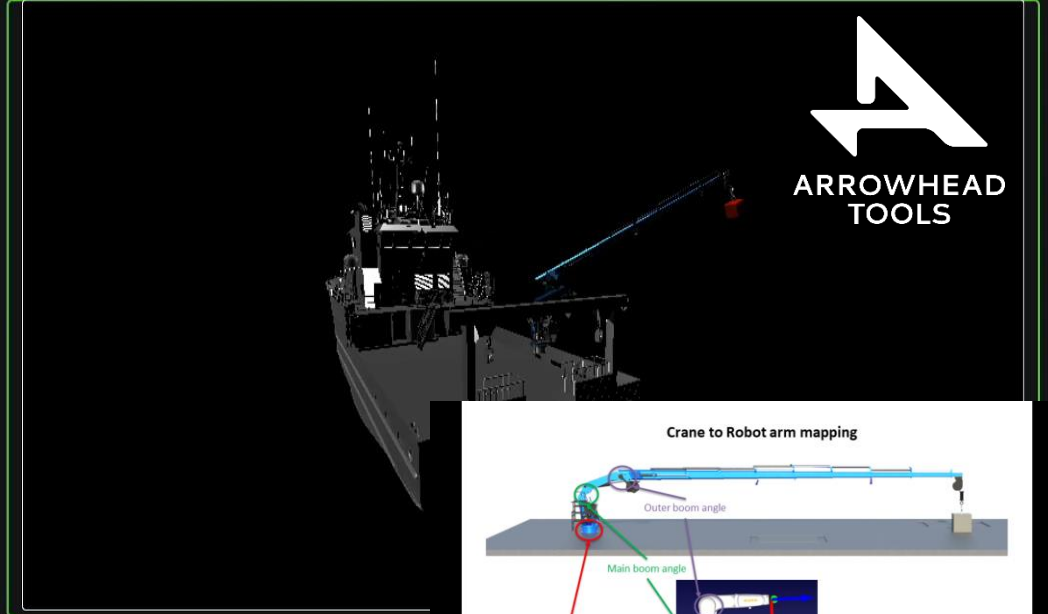

# Sensors installed

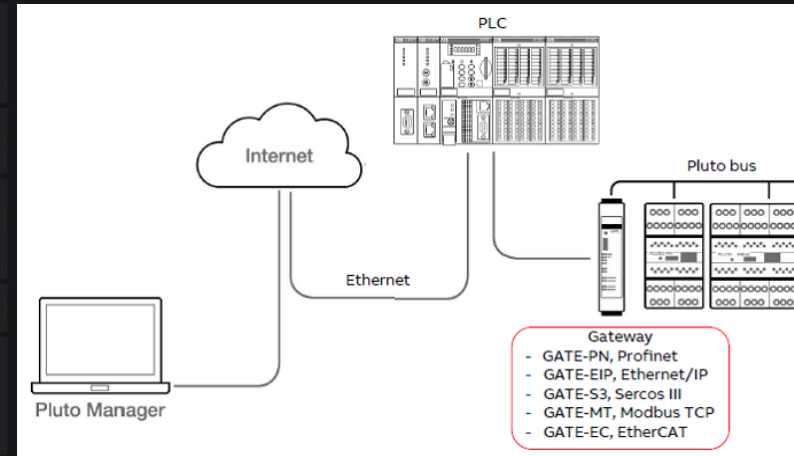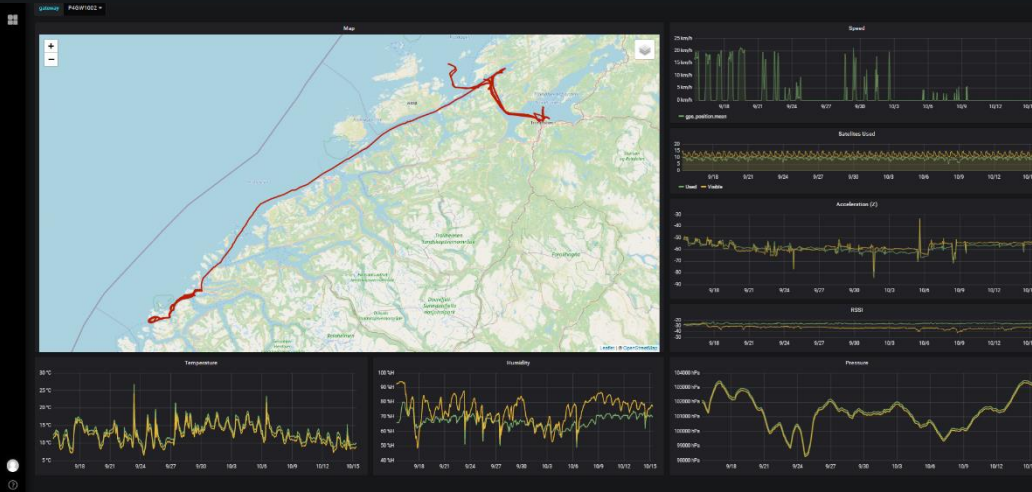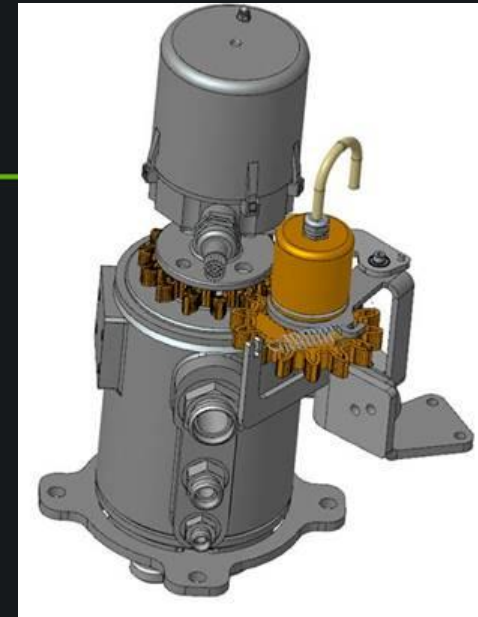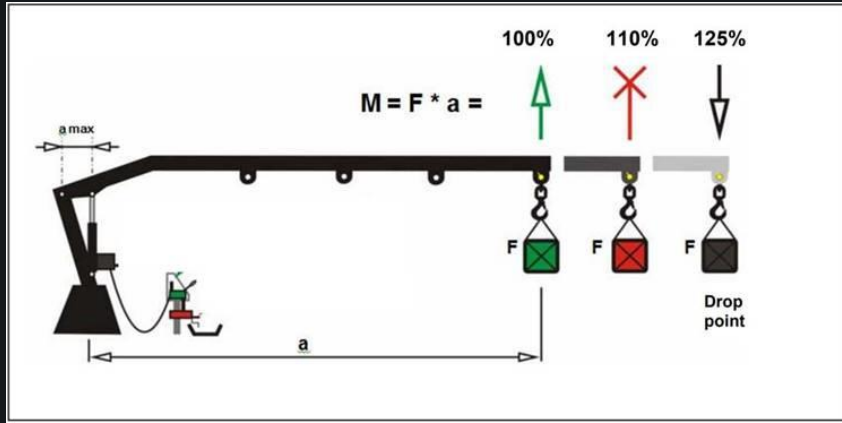



# CRANE PLC/Cloud based solutions



# Summary of the open-source Eclipse Arrowhead framework (video)

---



- **Questions?**

